


FR124

Combustion Regulator for solid fuel and multi-fuel boilers

Product specification sheet

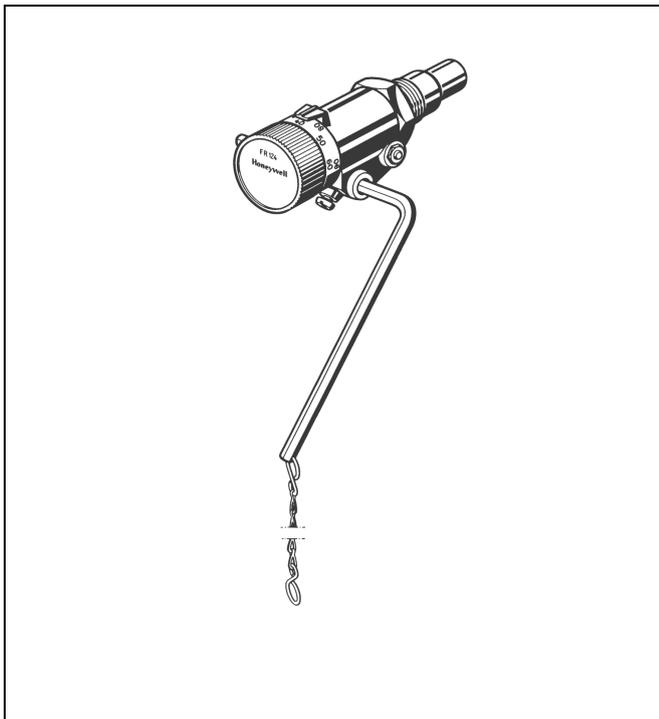

Application

The FR124 combustion regulator opens and closes the air intake flap of solid fuel boilers in proportion to the flow temperature.

Special Features

- Design tested to DIN EN14597 (Test No. FR108709) and DIN 3440 (Test No. FR 108701)
- Scale for horizontal and vertical installation
- Supplied with 120 mm lever rod and chain
- Compact construction

Range of Application

For solid fuel and multi-fuel heating installations to DIN EN12828

Technical Data

Setting range	30...90 °C
Permissible sensor temperature	max. 115 °C
Ambient air temperature	max. 70 °C on adjuster knob
Connection size	G 3/4"
Chain length	1.2 m
Chain load	100...600 g
Immersion tube length	53 mm

Construction


The FR124 Combustion Regulator consists of:

- Housing
- Adjuster knob
- Immersion pocket
- Lever rod
- Chain
- Wax thermostat
- Return spring

Materials

- High-quality synthetic material housing and adjuster knob
- Brass sensor pocket
- Galvanized steel lever rod
- Galvanized steel chain

Dimensions

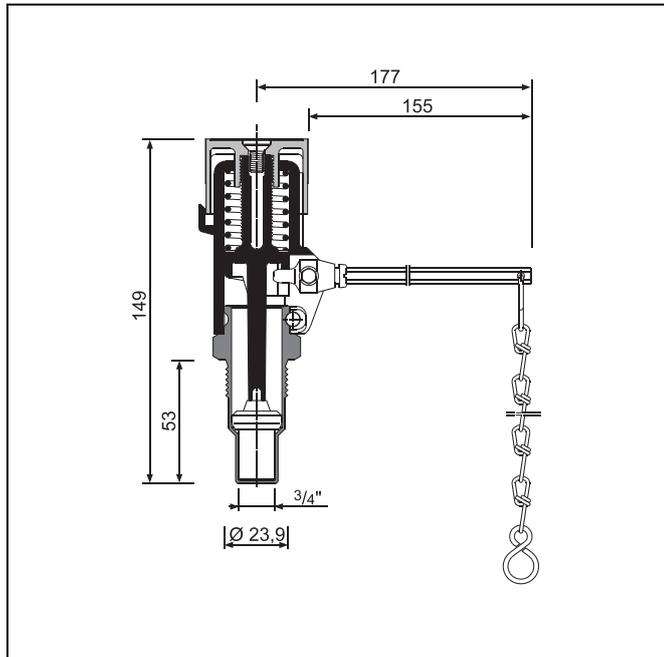

All dimensions in mm unless stated otherwise.


Method of Operation

The Combustion Regulator controls combustion by adjusting the supply of air to a boiler. The intergral thermostat measures the temperature in the heat generator and in relationship to the temperature regulates a lever with chain linkage to control the air inlet to the solid fuel boiler by opening or closing the air flap.

Options

FR124-3/4A = Standard version

Installation Example

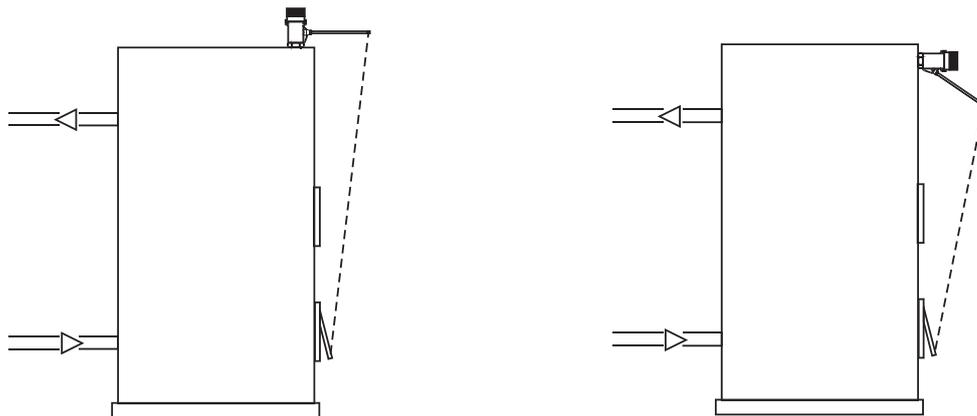

Automation and Control Solutions

Honeywell GmbH
 Hardhofweg
 D-74821 Mosbach
 Phone: (49) 6261 810
 Fax: (49) 6261 81309
<http://europe.hbc.honeywell.com>
www.honeywell.com

Manufactured for and on behalf of the
 Environmental and Combustion Controls Division
 of Honeywell Technologies Sàrl, Z.A. La Pièce 16,
 1180 Rolle, Switzerland by its Authorised Representative Honeywell GmbH

EN0H-1515GE23 R0310
 Subject to change without notice
 © 2010 Honeywell GmbH

Honeywell